

DIN 2566

Bridas roscadas con cuello
Presion nominal 10 y 16

Threaded flanges with neck
Rated pressure 10 and 16

Gewinde flansche mit Ansatz
Nennndruck 10 und 16

Medidas en milímetros

Dimensions in mm


Maße in mm

Diámetro Nominal Rated Diameter Nennweite	d1	Brida / Flange / Flansch					Cuello / Neck / Ansatz	Resalto / Raised face / Dichtleiste		Tornillos / Screws / Schrauben			Peso de una brida / Weight of a flange / Gewicht eines Flansches (7,85 Kg /dm3)
		Rosca / Thread / Whitworth- Rohrgewinde DIN 2999	D	b	k	h1	d3	d4	f	Numero / Number / Anzahl	Rosca / Thread / Gewinde	d2	Kg
6	10,2	R 1/8	75	12	50	18	20	32	2	4	M 10	11	0,326
8	13,5	R 1/4	80	12	55	18	25	38	2	4	M 10	11	0,38
10	17,2	R 3/8	90	14	60	20	30	40	2	4	M 12	14	0,544
15	21,3	R 1/2	95	14	65	20	35	45	2	4	M 12	14	0,613
20	26,9	R 3/4	105	16	75	24	45	58	2	4	M 12	14	0,91
25	33,7	R 1	115	16	85	24	52	68	2	4	M 12	14	1,1
32	42,4	R 1 1/4	140	16	100	26	60	78	2	4	M 16	18	1,6
40	48,3	R1 1/2	150	16	110	26	70	88	3	4	M 16	18'	1,78
50	60,3	R 2	165	18	125	28	85	102	3	4	M 16	18	2,43
65	76,1	R 2 1/2	185	18	145	32	105	122	3	4	M 16	18	3,18
80	88,9	R 3	200	20	160	34	118	138	3	8	M 16	18	4,12
100	114,3	R 4	220	20	180	38	140	158	3	8	M 16	18	4,47
125	139,7	R 5	250	22	210	40	168	188	3	8	M 16	18	6,13
150	165,1	R 6	285	22	240	44	195	212	3	8	M20	22	7,92

Bridas roscadas con cuello
Presion nominal 6, 10, 16, 25 y 40

Threaded flanges with neck
Rated pressure 6, 10, 16, 25 and 40

Gewinde flansche mit Ansatz
Nennndruck 6, 10, 16, 25 und 40

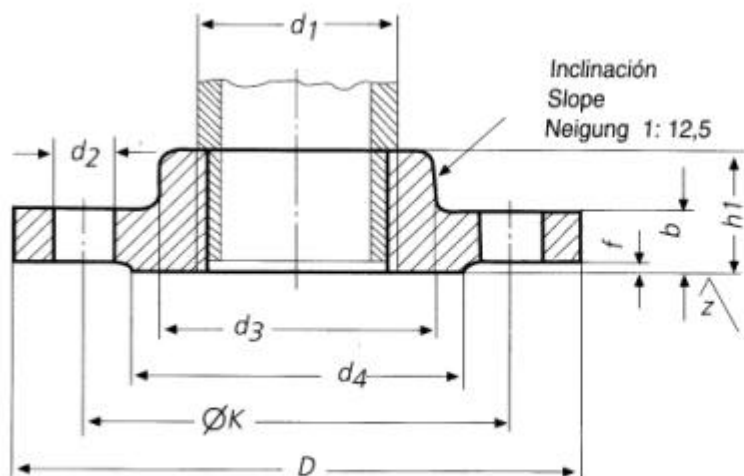

torneado
turning
dedreht
 $\sqrt{z} = \sqrt{R_z} = 160$