

DIN 2567

Bridas roscadas con cuello
Presion nominal 25 y 40

Threaded flanges with neck
Rated pressure 25 and 40

Gewinde flansche mit Ansatz
Nenndruck 25 und 40


Medidas en milímetros
Dimensions in mm
Maße in mm

Diámetro Nominal Rated Diameter Nennweite	d1	Brida / Flange / Flansch					Cuello / Neck / Ansatz	Resalto / Raised face / Dichtleiste		Tornillos / Screws / Schrauben			Peso de una brida / Weight of a flange / Gewicht eines Flansches (7,85 Kg/dm3)
		Rosca / Thread / Whitworth- Rohrgewinde DIN 2999	D	b	k	h1	d3	d4	f	Numero / Number / Anzahl	Rosca / Thread / Gewinde	d2	Kg
6	10,2	R 1/8	75	14	50	20	20	32	2	4	M 10	11	0,388
8	13,5	R 1/4	80	14	55	20	25	38	2	4	M 10	11	0,45
10	17,2	R 3/8	90	16	60	22	30	40	2	4	M 12	14	0,63
15	21,3	R 1/2	95	16	65	22	35	45	2	4	M 12	14	0,71
20	26,9	R 3/4	105	18	75	26	45	58	2	4	M 12	14	1,03
25	33,7	R 1	115	18	85	28	52	68	2	4	M 12	14	1,28
32	42,4	R 1 1/4	140	18	100	30	60	78	2	4	M 16	18	1,87
40	48,3	R 1 1/2	150	18	110	32	70	88	3	4	M 16	18	2,14
50	60,3	R 2	165	20	125	34	85	102	3	4	M 16	18	2,85
65	76,1	R 2 1/2	185	22	145	38	105	122	3	8	M 16	18	3,85
80	88,9	R 3	200	24	160	40	118	138	3	8	M 16	18	4,8
100	114,3	R 4	235	24	190	44	145	162	3	8	M20	22	6,43
125	139,7	R 5	270	26	220	48	170	188	3	8	M24	26	8,77
150	165,1	R 6	300	28	250	52	200	218	3	8	M24	26	10,5

Bridas roscadas con cuello
Presion nominal 6, 10, 16, 25 y 40

Threaded flanges with neck
Rated pressure 6, 10, 16, 25 and 40

Gewinde flansche mit Ansatz
Nenndruck 6, 10, 16, 25 und 40

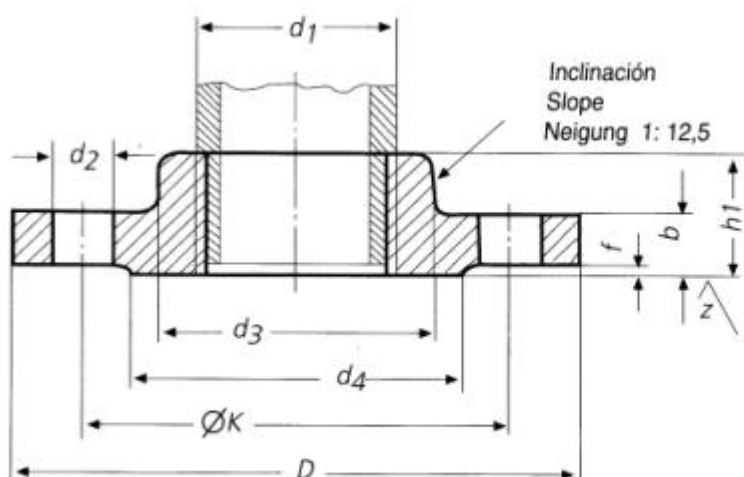

torneado
turning
dedreht
 $R_z = 160$