


DIN 2514

Cara de junta resalto y rebajo / Flanges, groove for rubber seal ring. / Vorsprung mit Eindrehung und Rücksprung.


Presión nominal de 10 a 40. Medidas de construcción. / Rated pressure from 10 to 40. Design sizes. / Nenndrucke 10 bis 40. konstruktionsmaße.

Medidas en milímetros / Dimensions in mm. / Maße in mm.

Rebajo - Forma R
Male - Shape R
Rücksprung - Form R

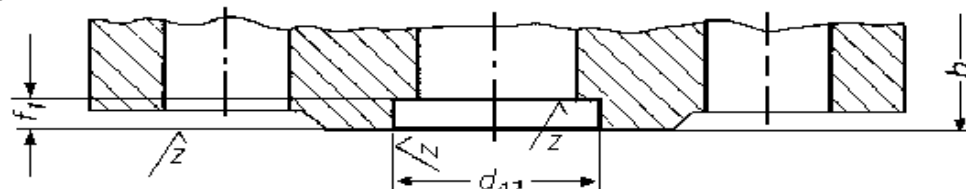

Resalto - Forma V
Female - Shape V
Vorsprung - Form V

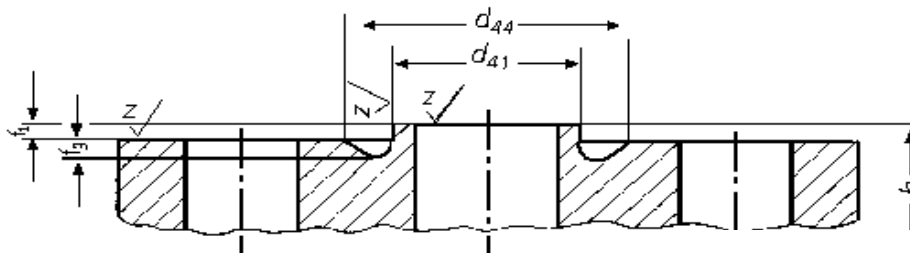


Medida para montaje:
Dimensions for mounting:
Maße beim Zusammenbau:

b=De la norma de bridas.
b=The standard one for the flange.
b=Blatt dicke nach Maßnorm.

$$\sqrt[3]{V} = \sqrt{R_2} = 160$$

Torneado
Turning
Gedreht

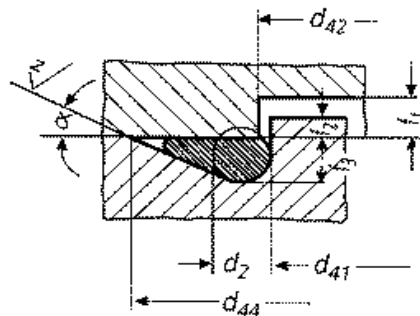

Diámetro Nominal Rated Diameter Diameter Nennweite	Resalto Male Vorsprung		Entalladura Groove Eindrehung			Rebajo Female Rücksprung		Anillo Ring Dichtring nach
	d ₄₁	f ₂	d ₄₄	f ₃	α $\approx$	d ₄₂	f ₁	DIN 2693
	0	0,5	0,5	0,2		0,5	0,5	d ₂
	-0,5	0	0	0		0	0	
10	23	2	35	4	64°	24	3,5	5
15	28		40		64°	29		
20	35		51		41°	36		
25	42		58		41°	43		
32	50		66		41°	51		
40	60		76		41°	61		
50	72		88		41°	73		
65	94		110		41°	95		
80	105	2,5	121	4,5	41°	106	4	6
100	128		150		32°	129		
125	154		176		32°	155		
150	182		204		32°	183		
(175)	212		234		32°	213		
200	238		260		32°	239		
250	291		313		32°	292		
300	342		364		32°	343		
350	394	3	422	5	27°	395	4,5	7
400	446		474		27°	447		
500	548		576		27°	549		
600	648		676		27°	649		
700	750		778		27°	751		
800	855		883		27°	856		
900	960		988		27°	961		
1000	1060		1092		28°	1061		
1200	1260	4	1292	6	28°	1262	5,5	8
1400	1460		1492		28°	1462		
1600	1660		1692		28°	1662		
1800	1860		1892		28°	1862		
2000	2060		2092		28°	2062		
2200	2260		2292		28°	2262		
2400	2460		2492		28°	2462		
2600	2660		2692		28°	2662		
2800	2860		2892		28°	2862		