


Steel-ring flanges-AWWA C207

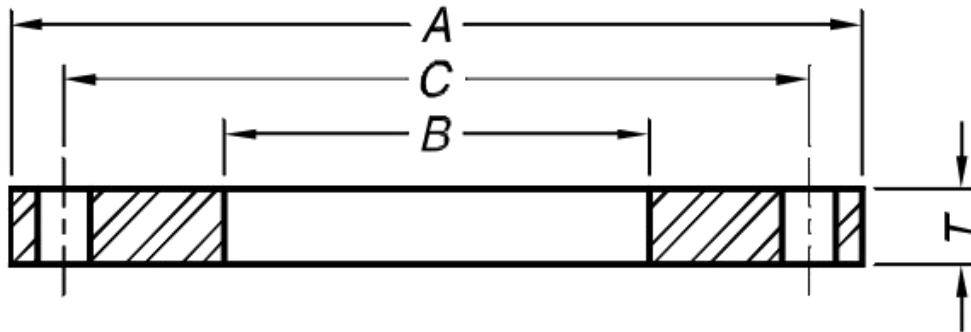

Class F

NPS	DN	OD, A	ID, B	Number of Bolts	Diam.of Bolt Circle, C	Diam.of Bolt	Thickness of Flange, T	Thickness of Blind, T
4	100	254.00	116.08	8	200.15	19.05	28.70	28.7
5	125	279.40	143.76	8	234.95	19.05	30.73	30.73
6	150	317.50	170.94	12	269.75	19.05	33.27	33.27
8	200	381.00	221.74	12	330.20	22.23	33.27	33.27
10	250	444.50	276.35	16	387.35	25.40	38.10	38.1
12	300	520.70	327.15	16	450.85	28.58	41.40	41.4
14	350	584.20	360.43	20	514.35	28.58	49.28	49.28
16	400	647.70	411.23	20	571.50	31.75	54.36	54.36
18	450	711.20	462.03	24	628.65	31.75	57.15	57.125
20	500	774.70	512.83	24	685.80	31.75	59.18	59.18
22	550	838.20	563.63	24	742.95	31.75	63.50	63.5
24	600	914.40	614.43	24	812.80	38.10	68.33	68.53
26	650	971.55		28	876.30	44.45	76.20	76.2
28	700	1035.05		28	939.80	44.45	79.50	79.5
30	750	1092.20		28	996.95	44.45	80.01	80.42
32	800	1149.35		28	1054.10	44.45	82.55	84.62
34	850	1206.50		28	1104.90	44.45	85.85	88.25
36	900	1270.00		32	1168.40	50.80	87.88	93.25
38	950	1327.15		32	1219.20	50.80	88.90	96.9
40	1000	1377.95		36	1276.35	50.80	92.20	101.4
42	1050	1447.80		36	1339.85	50.80	96.77	105.92
44	1100	1504.95		36	1397.00	50.80	101.60	110.19
46	1150	1562.10		40	1454.15	50.80	104.90	114.43
48	1200	1651.00		40	1543.05	50.80	114.30	121.44