


Blind Flanges - EN 1092-1

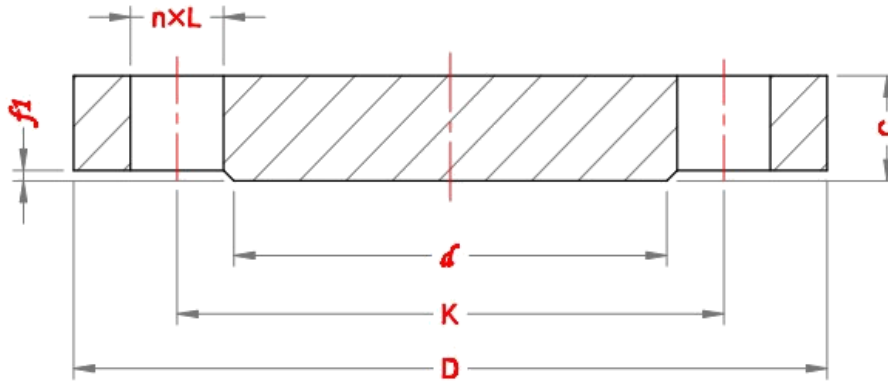

PN 10

DN	Outside Diameter, D	Diameter of Bolt Circle, K	Dia of Bolt Hole, L	No. of bolt	Size of Bolt	Flange thickness, C	Diameter of Raised Face, d	Height of Raised Face, f1
10	90	60	14	4	M12	16	40	2
15	95	65	14	4	M12	16	45	2
20	105	75	14	4	M12	18	58	2
25	115	85	14	4	M12	18	68	2
32	140	100	18	4	M16	18	78	2
40	150	110	18	4	M16	18	88	3
50	165	125	18	4	M16	18	102	3
65	185	145	18	8	M16	18	122	3
80	200	160	18	8	M16	20	138	3
100	220	180	18	8	M16	20	158	3
125	250	210	18	8	M16	22	188	3
150	285	240	22	8	M20	22	212	3
200	340	295	22	8	M20	24	268	3
250	395	350	22	12	M20	26	320	3
300	445	400	22	12	M20	26	370	4
350	505	460	22	16	M20	26	430	4
400	565	515	26	16	M24	26	482	4
450	615	565	26	20	M24	28	532	4
500	670	620	26	20	M24	28	585	4
600	780	725	30	20	M27	34	685	5
700	895	840	30	24	M27	38	800	5
800	1015	950	33	24	M30	48	905	5
900	1115	1050	33	28	M30	50	1005	5
1000	1230	1160	36	28	M33	54	1110	5
1200	1455	1380	39	32	M36	66	1330	5
1400	1675	1590	42	36	M39	72	1535	5
1600	1915	1820	48	40	M45	82	1760	5
1800	2115	2020	48	44	M45	92	1960	5
2000	2325	2230	48	48	M45	100	2170	5